

51.2V 100Ah & 200Ah LiFePO4 Powerwall Home Energy Storage Battery

51.2V 100Ah

ES-BOX3



South African Market

genixgreen's battery BMS supports simultaneous communication and docking with multiple inverter brands

SUN SYNK

Growatt

Deye 德業

MUST



51.2V 200Ah

ES-BOX4



American Market

genixgreen's battery BMS supports simultaneous communication and docking with multiple inverter brands

SolArk
Soluciones Arquitectónicas

Growatt

Deye 德業

Schneider Electric



Super Points: ONE Battery For Multiple Brand Inverters

Product advantages

Long cycle life

Using high-quality lithium iron phosphate batteries, the cycle life is more than 6000 times at 80%DOD, and can be used for 10-15 years



High quality prismatic lithium iron phosphate battery

Higher capacity, higher current, longer life

Low internal resistance and high current

Low internal resistance of the battery, excellent continuous high current discharge performance

Intelligent BMS battery protection

Built-in intelligent BMS (battery management system), effectively avoiding overcharge, overdischarge, overcurrent, short-circuit, balance and other problems



Communicated with multiple brands inverter same time

genixgreen's battery BMS supports simultaneous communication and docking with multiple brands inverter

Good safety performance

Extreme safety test, no fire, no explosion, no leakage

51.2V 100Ah & 200Ah LiFePO4 Powerwall Home Energy Storage Battery

KEY FEATURES

- ★ Automotive Grade Cells-16 cell **configuration**
- ★ Integrated CAN bus RS485 BMS.
- ★ LCD display shows battery information.
- ★ **Pre-configured with optimal** parameters.
- ★ No other LiFePO4 battery offers this functionality, longevity and warranty at our price.
- ★ Warranted for daily cycling.
- ★ **Communicated with inverter brand:** SMA, Studer, Solar-Edge, Schneider, DEYE, Solis, Sungrow, Growatt, Sofar, Must, Sol-Ark, Sunsynk and etc

Application

- ★ Over charge detection function
- ★ Over discharge detection function
- ★ Over current detection function
- ★ Temperature protection function
- ★ Short circuit detection function
- ★ Balance function
- ★ Upper computer software monitor
- ★ LCD Screen optional


Parameters

Product model	EX-BOX3	ES-BOX4
Product specification	51.2V 100Ah	51.2V 200Ah
Nominal voltage	51.2V	51.2V
Nominal capacity	100Ah	200Ah
Cell type	(LFP)	(LFP)
Standard charge voltage	58.4V	58.4V
Max charge current	100A	100A
Discharge cut-off voltage	40V	40V
Max discharge current	100A	100A
Display	LCD	LCD
Communication interface	RS485, RS232, CAN(Optional)	RS485, RS232, CAN(Optional)
Cycle life	≥ 6000 Cycles (80%DOD)	≥ 6000 Cycles (80%DOD)
Charge temperature range	0~65°C	0~65°C
Discharge temperature range	-20~65°C	-20~65°C
Colour	Black and white	Black and white
Dimensions	600X400X220MM	900X420X220MM
Weight	64Kg	105Kg
Installation method	(Wall mounted)	(Wall mounted)


51.2V 100Ah & 200Ah LiFePO4 Powerwall Home Energy Storage Battery

Charging and Discharge curve

● Charge and discharge curve @0.5C 25°C

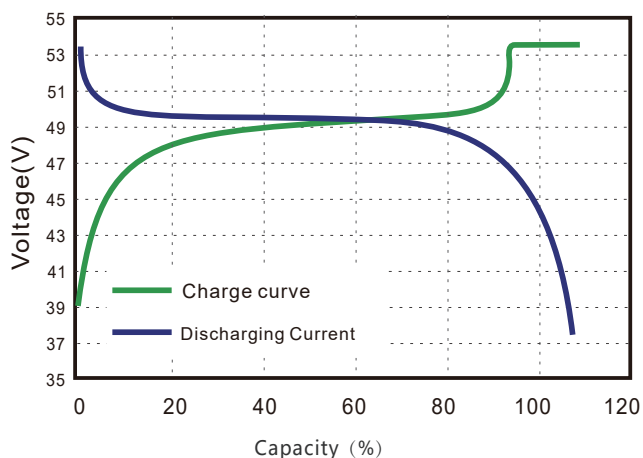


● Charging Characteristics @0.5C 25°C

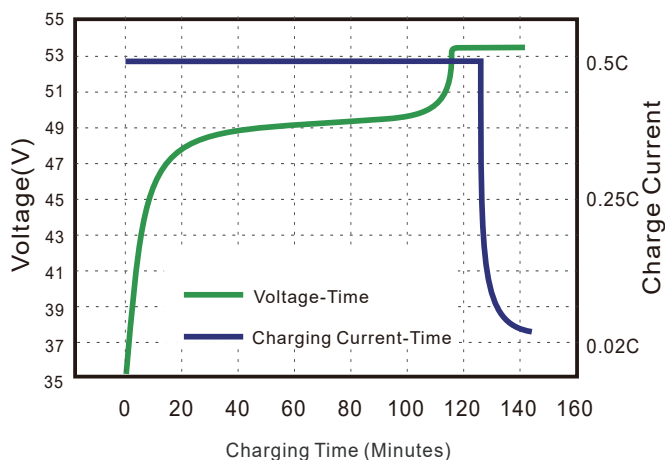


Different current/Temperature Discharge curves

● Different Rate Discharge Curve @25°C

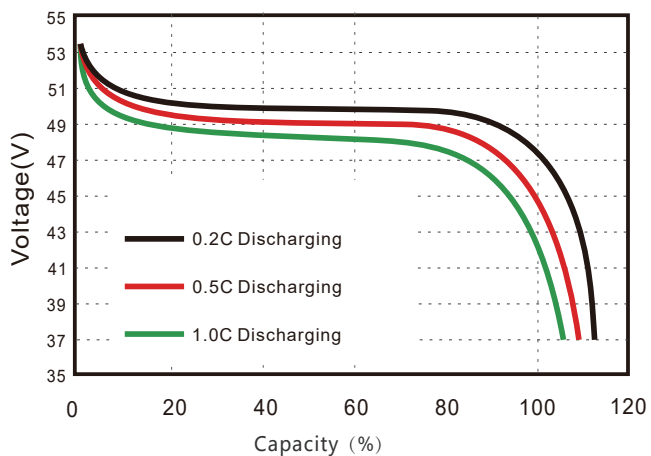


● Different Temperature Discharge Curve @0.5C

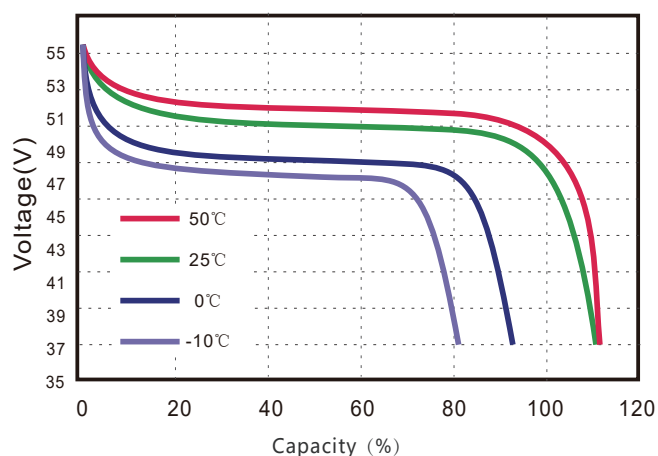


Cycle Life Curve

● Different discharge depth life curves @25°C 0.5C

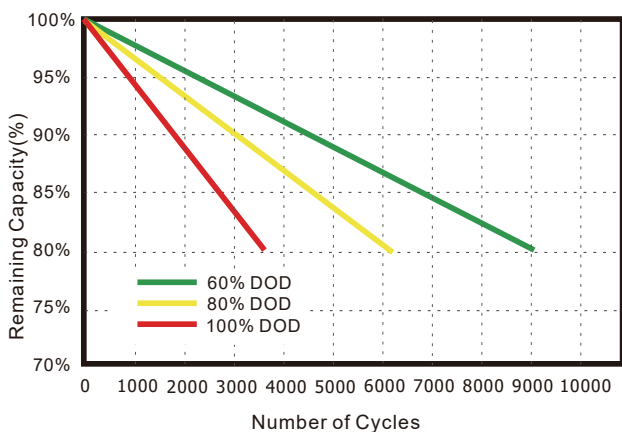



● Different discharge depth life curves @40°C 0.5C

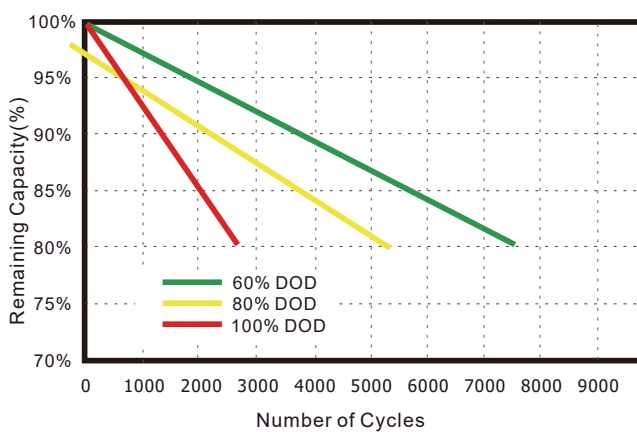

51.2V 100Ah & 200Ah LiFePO4 Powerwall Home Energy Storage Battery

GENIXGREEN[®]

Technology Luster Life

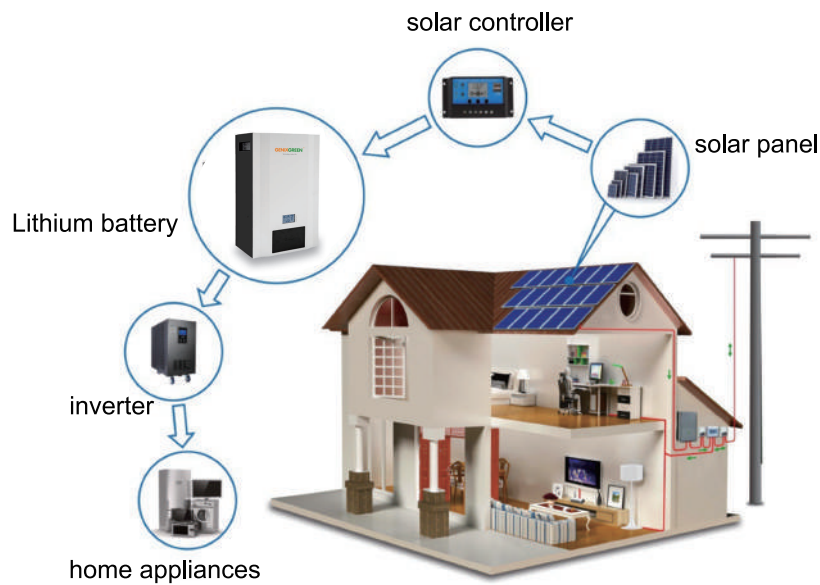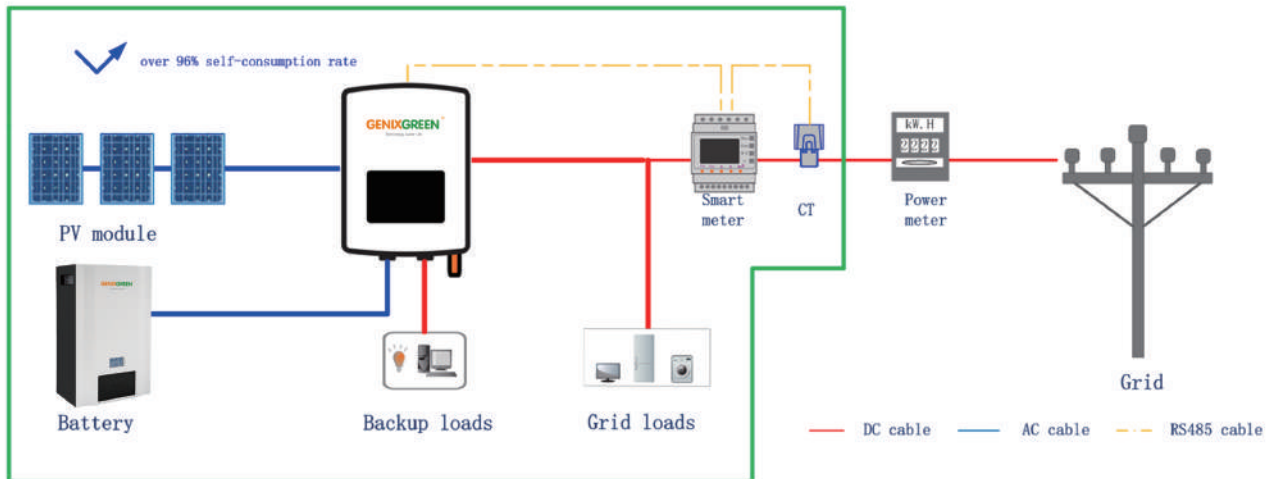

Product Application

